



Eclipse™ Hard Floor Sealer

SEALER



Eclipse Hard Floor Sealer is a water-based acrylic formula sealer for concrete, stone and similar hard floor surfaces.

DIRECTIONS


Read all directions and Safety Data Sheets (SDS) before using.

1. Strip and properly neutralize the floor, allowing it to dry thoroughly.
2. Apply 2 thin coats of sealer using a clean synthetic mop. Allow floor to dry thoroughly between coats.
3. Apply recommended floor coating, following manufacturer's instructions.

PRODUCT INFO

Product Code	403FS	403FSE	403MPE
Volume	2.50 US gallons	10 liters	4 liters
Shipping Package	2 x 2.5 gallons	2 x 10 liters	4 x 4 liters
Pallet Quantity	48	48	48

SURFACES

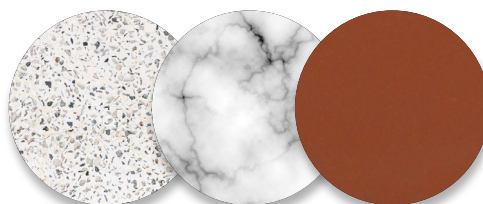

TERRAZZO

MARBLE

QUARRY
TILE

TECHNICAL DATA

Description	Polymer emulsion
Appearance	Milky white
Viscosity (Brookfield) @ 68°F (20°C)	<10 centipoise
Coverage Rate	1500 ft²/gal first coat 37 m²/l 2500 to 3000 ft²/gal 61 to 74 m²/liter
Dry Time	About 30 minutes
Removability ASTM D1792-06	Semi-permanent
VOC 40 CFR Part 59 Subpart C	7.02 %
Non-Volatile Solids ASTM D2834-95 (2008)	19%
pH ASTM E70-07	7.8
Frangrance	Slight solvent
Slip Resistance ULTM410	Meets requirements
Shelf Life ASTM D1791-93 (2008)	1 year
Density ASTM D1475-98 (2008)	8.5 lb/gal @ 68°F 1.02 kg/L @ 20°C
Detergent Resistance ASTM D3207-92 (2008)	Excellent
Freeze/Thaw ASTM D3209-93 (2008)	Passes 3 cycles
Container	2.5 US gal/9.5 L (FS packaging) 2.64 US gal/10 L (FSE packaging) 1.06 US gal/4 L (MPE packaging)



Floor Coating and Finishing materials
as to slip resistance only. 42E6

