



Eclipse™

PENETRATING SEALER



Eclipse Penetrating Sealer is a transparent water-based sealer that provides a durable, non-film-forming, continuous protective barrier on porous surfaces. It provides excellent oil and water repellency, resists staining and etching and is easier to clean and maintain than unsealed surfaces.

DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.

Penetrating Sealer is ready-to-use. Do NOT dilute.

1. Clean floor. If heavily soiled, clean with a degreaser.
2. Rinse floor thoroughly with water and allow to dry completely.
3. Fill pump-up sprayer with Penetrating Sealer to provide coverage of 150-300 ft² per gal (4-7 m² per liter) for medium to high porosity floors or 500-1000 ft² per gal (12-24 m² per liter) for low porosity floors.
4. Spray floor completely with the spray head set to a medium spray. Do not apply solution so heavily that puddles are formed.
5. Highly porous surfaces such as concrete require a second treatment which may be applied after the first treatment is dry (10-30 minutes).

PRODUCT INFO


Product Code 426MPE

Volume 4 liters

Shipping Package 4 x 4 liters

Pallet Quantity 48

SURFACES INDOOR/OUTDOOR

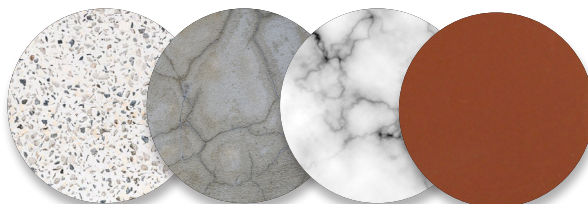

TERRAZZO

CONCRETE

MARBLE

QUARRY
TILE

TECHNICAL DATA

Description	Hard Floor Penetrating Sealer
Appearance	Clear, straw colored liquid
Viscosity (Brookfield) @ 68°F (20°C)	<10 centipoise
Flash Point ASTM D56-05 (2010)	>200°F (93°C)
Coverage Rate*	50 to 250 ft ² /gal 4 to 20 m ² /liter
Dry Time	15 - 30 minutes
VOC 40 CFR Part 59 Subpart D	<50 g/l
pH ASTM E70-07	9.6
Fragrance	No added fragrance
Shelf Life ASTM D1791-93 (2008)	2 years
Density ASTM D1475-98 (2008)	8.4 lb/gal @ 68°F 1.01 kg/L @ 20°C
Detergent Resistance ASTM D3207-92 (2008)	Excellent
Freeze/Thaw ASTM D3209-93 (2008)	Passes 3 cycles
Container	1.06 US gal/4 L (MPE packaging)

*Coverage is approximate and may vary depending on surface finish/texture, concrete condition, climatic conditions, etc.

